Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) EP 1 181 943 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication: 27.02.2002 Bulletin 2002/09

(51) Int CI.7: **A61L 31/00**, A61F 2/06

(21) Application number: 01126059.3

(22) Date of filing: 20.04.1994

(84) Designated Contracting States: **DE FR NL**

(30) Priority: 26.04.1993 US 52878

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC: 94302807.6 / 0 623 354

(71) Applicant: Medtronic, Inc.
Minneapolis, Minnesota 55432-5604 (US)

(72) Inventors:

Berg, Eric P.
 Plymouth, Minnesota 55447 (US)

Tuch, Ronald J.
 Plymouth, Minnesota 55436 (US)

 Dror, Michael Edina, Minnesota 55436 (US)

Wolff, Rodney G.
 Minnetonka Beach, Minnesota 55361 (US)

(74) Representative: Golding, Louise Ann Frank B. Dehn & Co., 179 Queen Victoria Street London EC4V 4EL (GB)


Remarks:

This application was filed on 01 - 11 - 2001 as a divisional application to the application mentioned under INID code 62.

(54) Intravascular stents

(57) The invention provides an intravascular stent prepared by applying to the body of a balloon-expandable stent a solution which comprises a solvent, a polymer, and a therapeutic substance and then drying the solution. Stents having a polymeric, therapeutic sub-

stance-releasing coating in which the coating is less than 0.005 cm thick and/or in which the ratio of therapeutic substance to polymer is in the range of from about 10:1 to about 1:100 form a particularly preferred aspect of the invention.

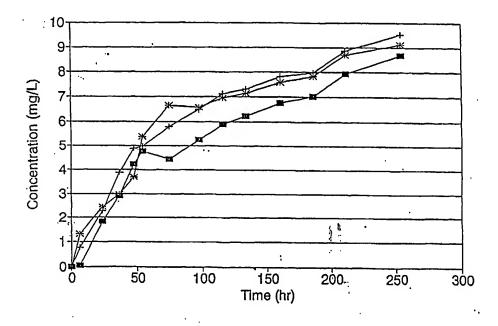

Description

5

10

15

20

25

30

35

40

[0001] This invention relates to intravascular stents for treatment of injuries to blood vessels and particularly to stents having a framework onto which a therapeutic substance or drug is applied.

[0002] Although angioplasty procedures have increased greatly in popularity for treatment of occluded arteries, the problem of restenosis following the angioplasty treatment remains a significant problem. Restenosis is the closure of a peripheral or coronary artery following trauma to the artery caused by efforts to open an occluded portion of the artery by angioplasty, such as, for example, by balloon dilation, atherectomy or laser ablation treatment of the artery. For these angioplasty procedures, restenosis occurs at a rate of about 30-60% depending upon the vessel location, lesion length and a number of other variables.

[0003] One aspect of restenosis may be simply mechanical; e.g. caused by the elastic rebound of the arterial wall and/or by dissections in the vessel wall caused by the angioplasty procedure. These mechanical problems have been successfully addressed by the use of stents to tack-up dissections and prevent elastic rebound of the vessel, thereby reducing the level of restenosis for many patients. The stent is typically inserted by catheter into a vascular lumen and expanded into contact with the diseased portion of the arterial wall, thereby providing internal support for the lumen. Examples of stents which have been successfully applied over a PTCA balloon and radially expanded at the same time as the balloon expansion of an affected artery include the stents disclosed in US-A-4733665 (Palmaz), US-A-4800882 (Gianturco) and US-A-4886062 (Wiktor) which are incorporated herein by reference in their entirety.

[0004] Another aspect of restenosis is believed to be a natural healing reaction to the injury of the arterial wall that is caused by angioplasty procedures. The final result of the complex steps of the healing process is intimal hyperplasia, the migration and proliferation of medial smooth muscle cells, until the artery is again occluded.

[0005] To address both aspects of the restenosis problem, it has been proposed to provide stents which are seeded with endothelial cells (see Dichek,D.A. et al. "Seeding of Intravasoular Stents With Genetically Engineered Endothelial Cells", Circulation 80: 1347-1353 (1989)). In that experiment, sheep endothelial cells that had undergone retrovirus-mediated gene transfer for either bacterial beta-galactosidase or human tissue-type plasminogen activator were seeded onto stainless steel stents and grown until the stents were covered. The cells were therefore able to be delivered to the vascular wall where they could provide therapeutic proteins. Other methods of providing therapeutic substances to the vascular wall include simple heparin-coated metallic stents, whereby a heparin coating is ionically or covalently bonded to the stent. Still other methods of providing therapeutic substances to the vascular wall by means of stents have also been proposed such as in US-A-5102417 (Palmaz), WO-91/12779 "Intraluminal Drug Eluting Prosthesis" and WO-90/13332 "Stent With Sustained Drug Delivery". In the latter two, it is suggested that antiplatelet agents, anticoagulant agents, antimicrobial agents, antimetabolic agents and other drugs could be supplied in stents to reduce the incidence of restenosis.

[0006] Metal stents such as those disclosed in US-A-4733665 (Palmaz), US-A-4800882 (Gianturco) and US-A-4886062 (Wiktor) could be suitable for drug delivery in that they are capable of maintaining intimate contact between a substance applied to the outer surface of the stent and the tissues of the vessel to be treated. However, there are significant problems to be overcome in order to secure a therapeutically significant amount of a substance onto the metal of the stent; to keep it on the stent during expansion of the stent into contact with the blood vessel wall; and also controlling the rate of drug delivery from the drug on the stent to the vessel wall.

[0007] There thus remains a need for means for providing a stent having a therapeutically significant amount of a drug applied thereto.

[0008] We have discovered a method for making an intravascular stent which meets this need.

[0009] Viewed from one aspect therefore the invention provides a method for making an intravascular stent comprising the steps of:

- (a) providing a generally cylindrical stent body;
- (b) applying to the stent body a solution which comprises a solvent, a polymer dissolved in the solvent and a therapeutic substance dispersed in the solvent; and
- (c) evaporating said solvent.

[0010] Viewed from a further aspect the invention provides the use of a solution containing a dissolved polymer and a dispersed therapeutic substance for the manufacture of a therapeutic agent comprising an intravascular stent having a polymeric drug-eluting surface coating.

[0011] Viewed from a still further aspect the invention provides stents made by the method of the invention.

[0012] In the method of the invention there is applied to the body of a stent, and in particular to its tissue-contacting surface, a solution which includes a solvent, a polymer dissolved in the solvent and a therapeutic substance (i.e. a drug) dispersed in the solvent, and the solvent thereafter is evaporated to leave a drug-elating polymeric surface on the stent. The inclusion of a polymer in intimate contact with a drug on the stent allows the drug to be retained on the

45

stent in a resilient matrix during expansion of the stent and also slows the administration of drug following implantation. The method of the invention can be used whether the stent has a metallic or polymeric surface. The method is also an extremely simple one since it can be effected by simply immersing the stent into the solution or by spraying the solution onto the stent. The amount of drug to be included on the stent can be readily controlled by applying multiple thin coats of the solution while allowing it to dry between coats. The overall coating should be generally thin enough so that it will not significantly increase the profile of the stent for intravascular delivery by catheter. It is therefore preferably less than about 0.002 inch (0.05 mm) thick and most preferably less than 0.001 inch (0.025 mm) thick. The adhesion of the coating and the rate at which the drug is delivered can be controlled by the selection of an appropriate bioabsorbable or biostable polymer and by the ratio of drug to polymer in the solution. By this method, drugs such as glucocorticoids (e.g. dexamethasone, betamethasone), heparin, hirudin, tocopherol, angiopeptin, aspirin, ACE inhibitors, growth factors, oligonucleotides, and, more generally, antiplatelet agents, anticoagulant agents, antimitotic agents, antioxidants, antimetabolite agents, and anti-inflammatory agents can be applied to a stent, retained on a stent during expansion of the stent and elute the drug at a controlled rate. The release rate can be further controlled by varying the ratio of drug to polymer in the multiple layers. For example, a higher drug-to-polymer ratio in the outer layers than in the inner layers would result in a higher early dose which would decrease over time.

10

20

25

30

35

40

45

55

[0013] In operation, the stent made according to the present invention can deliver drugs to a body lumen by introducing the stent transluminally into a selected portion of the body lumen and radially expanding the stent into contact with the body lumen. The transluminal delivery can be accomplished by a catheter designed for the delivery of stents and the radial expansion can be accomplished by balloon expansion of the stent, by self-expansion of the stent, or a combination of self-expansion and balloon expansion.

[0014] Thus the present invention provides a stent which may be delivered and expanded in a selected blood vessel without losing a therapeutically significant amount of a drug applied thereto. It also provides a drug-containing stent which allows for a sustained release of the drug to vascular tissue.

[0015] The underlying structure of the stent used according to the invention can be virtually any stent design, for example of the self-expanding type or of the balloon-expandable type, and of metal or polymeric material. Thus metal stent designs such as those disclosed in US-A-4733665 (Palmaz), US-A-4800882 (Gianturco) and US-A-4886062 (Wiktor) could be used in the present invention. The stent could be made of virtually any bio-compatible material having physical properties suitable for the design. For example, tantalum and stainless steel have been proven suitable for many such designs and could be used in the present invention. Also, stents made with biostable or bioabsorbable polymers such as poly(ethylene terephthalate), polyacetal, poly(lactic acid), poly(ethylene oxide)/poly(butylene terephthalate) copolymer could be used in the present invention. Although the stent surface should be clean and free from contaminants that may be introduced during manufacturing, the stent surface requires no particular surface treatment in order to retain the coating applied in the present invention. Both the inner and outer surfaces of the stent may be provided with the coating according to the present invention.

[0016] In order to provide the coated stent according to the present invention, a solution which includes a solvent, a polymer dissolved in the solvent and a therapeutic substance dispersed in the solvent is first prepared. The solvent, polymer and therapeutic substance should of course be mutually compatible. The solvent should be capable of placing the polymer into solution at the concentration desired. Moreover the solvent and polymer should not chemically alter the therapeutic character of the therapeutic substance. However, the therapeutic substance only needs to be dispersed throughout the solvent so that it may be either in a true solution with the solvent or dispersed in fine particles in the solvent. Examples of some suitable combinations of polymer, solvent and therapeutic substance are set forth in Table 1 below.

TABLE 1

POLYMER	SOLVENT	THERAPEUTIC SUBSTANCE
poly(L-lactic acid) poly(lactic acid-co-glycolic acid) polyether urethane silicone adhesive poly(hydroxy-butyrate-co-hydroxyvalerate) fibrin	chloroform acetone N-methyl pyrrolidone xylene dichloro-methane water (buffered saline)	dexamethasone dexamethasone tocopherol (vitamin E) dexamethasone phosphate aspirin heparin

[0017] The solution is applied to the stent and the solvent is allowed to evaporate, thereby leaving on the stent surface a coating of the polymer and the therapeutic substance. Typically, the solution can be applied to the stent by either spraying the solution onto the stent or immersing the stent in the solution. Whether one chooses application by immersion or application by spraying depends principally on the viscosity and surface tension of the solution, however, it has

been found that spraying in a fine spray such as that available from an airbrush will provide a coating with the greatest uniformity and will provide the greatest control over the amount of coating material to be applied to the stent. In either a coating applied by spraying or by immersion, multiple application steps are generally desirable to provide improved coating uniformity and improved control over the amount of therapeutic substance to be applied to the stent.

[0018] The polymer chosen should be a polymer that is biocompatible and minimizes irritation to the vessel wall when the stent is implanted. The polymer may be either a biostable or a bioabsorbable polymer depending on the desired rate of release or the desired degree of polymer stability, but a bioabsorbable polymer may be more desirable since, unlike a biostable polymer, it will not be present long after implantation to cause any adverse, chronic local response. Bioabsorbable polymers that could be used include poly(L-lactic acid), polycaprolactone, poly(lactide-coglycolide), poly(hydroxybutyrate), poly(hydroxybutyrate-co-valerate), polydioxanone, polyorthoester, polyanhydride, poly(glycolic acid), poly(D,L-lactic acid), poly(glycolic acid-co-trimethylene carbonate), polyphosphoester, polyphosphoester urethane, poly(amino acids), cyanoacrylates, poly(trimethylene carbonate), poly(iminocarbonate), copoly (ether-esters) (e.g. PEO/PLA), polyalkylene oxalates, polyphosphazenes and biomolecules such as fibrin, fibrinogen, cellulose, starch, collagen and hyaluronic acid. Also, biostable polymers with a relatively low chronic tissue response such as polyurethanes, silicones, and polyesters could be used and other polymers could also be used if they can be dissolved and cured or polymerized on the stent such as polyolefins, polyisobutylene and ethylene-alphaolefin copolymers; acrylic polymers and copolymers, vinyl halide polymers and copolymers, such as polyvinyl chloride; polyvinyl ethers, such as polyvinyl methyl ether; polyvinylidene halides, such as polyvinylidene fluoride and polyvinylidene chloride; polyacrylonitrile, polyvinyl ketones; polyvinyl aromatics, such as polystyrene, polyvinyl esters, such as polyvinyl acetate; copolymers of vinyl monomers with each other and olefins, such as ethylene-methyl methacrylate copolymers, acrylonitrile-styrene copolymers, ABS resins, and ethylene-vinyl acetate copolymers; polyamides, such as Nylon 66 and polycaprolactam; alkyd resins; polycarbonates; polyoxymethylenes; polyimides; polyethers; epoxy resins, polyurethanes; rayon; rayon-triacetate; cellulose, cellulose acetate, cellulose butyrate; cellulose acetate butyrate; cellulose phane; cellulose nitrate; cellulose propionate; cellulose ethers; and carboxymethyl cellulose.

[0019] The ratio of therapeutic substance to polymer in the solution will depend on the efficacy of the polymer in securing the therapeutic substance onto the stent and the rate at which the coating is to release the therapeutic substance to the tissue of the blood vessel. More polymer may be needed if it has relatively poor efficacy in retaining the therapeutic substance on the stent and more polymer may be needed in order to provide an elution matrix that limits the elution of a very soluble therapeutic substance. A wide ratio of therapeutic substance to polymer could therefore be appropriate and the weight ratio could range from about 10:1 to about 1:100.

[0020] The therapeutic substance used in the present invention could be virtually any therapeutic substance which possesses desirable therapeutic characteristics for application to a blood vessel. This can include both solid substances and liquid substances. For example, glucocorticoids (e.g. dexamethasone, betamethasone), heparin, hirudin, tocopherol, angiopeptin, aspirin, ACE inhibitors, growth factors, oligonucleotides, and, more generally, antiplatelet agents, anticoagulant agents, antimitotic agents, antioxidants, antimetabolite agents, and anti-inflammatory agents could be used. Antiplatelet agents can include drugs such as aspirin and dipyridamole. Aspirin is classified as an analgesic, antipyretic, anti-inflammatory and antiplatelet drug. Dipyridimole is a drug similar to aspirin in that it has anti-platelet characteristics. Dipyridimole is also classified as a coronary vasodilator. Anticoagulant agents can include drugs such as heparin, coumadin, protamine, hirudin and tick anticoagulant protein. Antimitotic agents and antimetabolite agents can include drugs such as methotrexate, azathioprine, vincristine, vinblastine, fluorouracil, adriamycin and mutamycin. [0021] Embodiments of the invention will now be described further with reference to the following non-limiting Examples and the accompanying drawings, in which:

Fig. 1 is a plot showing elution profiles for stents according to the present invention with a coating of dexamethasone and poly(L-lactic acid) made according to Example 6; and

Fig. 2 is a plot showing elution profiles for sterilized stents according to the present invention with a coating of dexamethasone and poly(L-lactic acid) made according to Example 7.

[0022] In the Examples percentages and ratios are by weight unless otherwise stated.

EXAMPLE 1 (COMPARATIVE)

10

15

20

25

30

35

40

45

50

[0023] A 1% solution of dexamethasone in acetone was made, forming a clear solution. The solution was placed in an airbrush reservoir (Badger #200). Wiktor type tantalum wire stents were sprayed with the solution in short bursts while rotating the stents. The acetone quickly evaporated from the stents, leaving a white residue on the stent wire. The process was continued until all of the stent wires were coated. The drug elution rate for the stent was determined by immersing the stent in phosphate buffered saline solution (pH=7.4). Traces of dexamethasone were observed to remain on the immersed stents for less than 31 hours.

EXAMPLE 2 (COMPARATIVE)

[0024] A 2% solution of dexamethasone in acetone was made, forming a solution with suspended particles of dexamethasone. The solution was placed into a tube. Wiktor type tantalum wire stents were dipped rapidly and were allowed to dry. Each stent was dipped into the solution 12-15 times to provide a white surface coating. Two stents were placed on an angioplasty balloon and were inflated on the balloon. Approximately 80% of the dexamethasone coating flaked off of the stents.

EXAMPLE 3

5

10

15

20

30

35

45

[0025] A solution of 1% dexamethasone and 0.5% poly(caprolactone) (Aldrich 18,160-9) in acetone was made. The solution was placed into a tube. Wiktor type tantalum wire stents were dipped rapidly and were allowed to dry. Each stent was dipped into the solution 12-15 times to provide a white surface coating. A stent so coated was expanded on a 3.5mm angioplasty balloon causing a significant amount of the coating to become detached.

EXAMPLE 4

[0026] A solution of 1% dexamethasone and 0.5% poly(L-lactic acid) (Medisorb) in acetone was made. The solution was placed into a tube. Wiktor type tantalum wire stents were dipped rapidly and were allowed to dry. Each stent was dipped into the solution 12-15 times to provide a white surface coating. A stent so coated was expanded on a 3.5mm angioplasty balloon causing only a small portion of the coating (less than 25%) to become detached)

EXAMPLE 5

[0027] A solution including a 2% dispersion of dexamethasone and a 1% solution of poly(L-lactic acid) (CCA Biochem MW=550,000) in chloroform was made. The solution was placed into an airbrush (Badger). Wiktor type tantalum wire stents were sprayed in short bursts and were allowed to dry. Each stent was sprayed with the solution about 20 times to provide a white surface coating. A stent so coated was expanded on a 3.5mm angioplasty balloon. The coating remained attached to the stent throughout the procedure.

EXAMPLE 6

[0028] A solution including a 2% dispersion of dexamethasone and a 1% solution of poly(L-lactic acid) (CCA Biochem MW=550,000) in chloroform was made. The solution was placed into an airbrush (Badger #250-2). Wiktor type tantalum wire stents were suspended from a fixture and sprayed in 24 short bursts (6 bursts from each of the four directions perpendicular to the stent axis) and were allowed to dry. The resulting stents had a coating weight of about 0.0006-0.0015 grams. Three of the stents were tested for long term elution by placing one stent in 3.0 ml of phosphate buffered saline solution (pH=7.4) at ambient temperature without stirring. The amount of dexamethasone eluted was evaluated by measuring absorbance at 244 nm in a UV-VIS spectrophotometer. The results of this test are shown in Figure 1.

EXAMPLE 7

[0029] A solution including a 2% dispersion of dexamethasone and a 1% solution of poly(L-lactic acid) (Medisorb 100-L) in chloroform was made along with a control solution of 1% of poly(L-lactic acid) (Medisorb 100-L) in chloroform. The solutions were placed into an airbrush (Badger #250-2). Wiktor type tantalum wire stents were expanded on a 3.0mm balloon, suspended from a fixture and sprayed in 16 short bursts (2-3 bursts of about 1 second followed by several minutes drying time between applications). The resulting dexamethasone-coated stents had an average coating weight of about 0.0012 grams while the polymer-coated stents had an average polymer weight of about 0.0004 grams. The stents were sterilized in ethylene oxide. Three of the sterilized dexamethasone-coated stents were tested for long term elution by placing one stent in 3.0 ml of phosphate buffered saline solution (pH=7.4) at ambient temperature without stirring. The amount of dexamethasone eluted was evaluated by measuring absorbance at 244 nm in a UV-VIS spectrophotometer. The results of this test are shown in Figure 2. Dexamethasone-coated stents and polymer-coated control stents were implanted in the coronary arteries of 8 pigs (N=12 for each type) according to the method set forth in "Restenosis After Balloon Angioplasty - A Practical Proliferative Model in Porcine Coronary Arteries," by Robert S. Schwartz et al., Circulation 82(6):2190-2200 (1990), and "Restenosis and the Proportional Neointimal Response to Coronary Artery Injury: Results in a Porcine Model" by Robert S. Schwartz et al., J Am Coll Cardiol 19:267-274 (1992) with the result that when compared with the controls, the dexamethasone-coated stents reduced the amount of prolif-

eration associated with the arterial injury.

Claims

5

10

15

20

25

30

35

40

50

- 1. An intravascular stent comprising a generally cylindrical stent body having a polymeric drug-eluting surface coating wherein the stent is obtainable by a method comprising the steps of:
 - (a) providing a generally cylindrical balloon-expandable stent body;
 - (b) applying to the stent body a solution which comprises a solvent, a polymer, and a therapeutic substance; and
 - (c) drying said solution whereby to provide a coating to the stent body of a polymer and the therapeutic substance.
- 2. An intravascular stent as claimed in claim 1 comprising a generally cylindrical stent body having a polymeric drugeluting surface coating wherein the stent is obtainable by a method comprising the steps of:
 - (a) providing a generally cylindrical balloon-expandable stent body;
 - (b) applying to the stent body a solution which comprises a solvent, a polymer, and a therapeutic substance; and
 - (c) drying said solution whereby to provide a coating to the stent body of a polymer and the therapeutic substance in which the coating is less than 0.005 cm thick.
- 3. An intravascular stent as claimed in claim 1 comprising a generally cylindrical stent body having a polymeric drugeluting surface coating wherein the stent is obtainable by a method comprising the steps of:
 - (a) providing a generally cylindrical balloon-expandable stent body;
 - (b) applying to the stent body a solution which comprises a solvent, a polymer, and a therapeutic substance wherein the ratio of therapeutic substance to polymer is in the range of from about 10:1 to about 1:100; and (c) drying said solution whereby to provide a coating to the stent body of a polymer and the therapeutic substance.
- 4. A stent obtainable by a method as defined in any one of claims 1 to 3 further comprising the step of repeating the step of applying to the stent body a solution which comprises a solvent, a polymer, and a therapeutic substance.
- 5. A stent obtainable by a method as defined in any one of claims 1 to 3 wherein the solution comprises a solvent, a polymer dissolved in the solvent and a therapeutic substance dissolved in the solvent.
- 6. A stent obtainable by a method as defined in claim 5 further comprising the step of repeating the step of applying to the stent body the solution comprising a solvent, a polymer dissolved in the solvent and a therapeutic substance dissolved in the solvent.
- 7. A stent obtainable by a method as defined in any one of claims 1 to 3 wherein the solution comprises a solvent, a polymer dissolved in the solvent and a therapeutic substance dispersed in the solvent.
- 8. A stent obtainable by a method as defined in claim 7 further comprising the step of repeating the step of applying to the stent body the solution comprising a solvent, a polymer dissolved in the solvent and a therapeutic substance dispersed in the solvent.
 - 9. A stent obtainable by a method as defined in any one of claims 1 to 8 wherein said stent body has a metal surface.
 - 10. A stent obtainable by a method as defined in any one of claims 1 to 8 wherein said stent body has a polymeric surface.
 - 11. A stent obtainable by a method as defined in any one of claims 1 to 10 wherein said solution is applied to said body by spraying.
 - 12. A stent obtainable by a method as defined in any one of claims 1 to 10 wherein said solution is applied to said body by immersion.

- 13. A stent obtainable by a method as defined in any one of claims 1 to 12 wherein said solution is applied to said body in a plurality of application and drying steps.
- 14. A stent obtainable by a method as defined in claim 13 wherein the concentration ratio of said therapeutic substance to said polymer in said solution is varied between some of said plurality of application steps.
- 15. A stent obtainable by a method as defined in any one of claims 1 to 14 wherein said polymer is a bioabsorbable polymer.
- 16. A stent obtainable by a method as defined in claim 15 wherein said polymer is selected from poly(L-lactic acid), poly(lactide-co-glycolide) and poly(hydroxybutyrate-co-valerate).
 - 17. A stent obtainable by a method as defined in any one of claims 1 to 14 wherein said polymer is a biostable polymer.
- 18. A stent obtainable by a method as defined in claim 17 wherein said polymer is selected from silicones, polyurethanes, polyesters, vinyl homopolymers and copolymers, acrylate homopolymers and copolymers, polyethers and cellulosics.
 - 19. A stent obtainable by a method as defined in any one of claims 1 to 14 wherein said polymer is selected from poly (L-lactic acid), poly(lactide-co-glycolide), fibrin, silicone, polyurethane, and poly(phosphoester urethane).
 - 20. A stent obtainable by a method as defined in any one of claims 1, 2 and 4 to 19 wherein the weight ratio of said therapeutic substance to said polymer in said solution is in the range of about 10:1 to 1:100.
- 21. A stent obtainable by a method as defined in any one of claims 1 to 20 wherein said therapeutic substance is selected from glucocorticoids, dexamethasone, dexamethasone sodium phosphate, anticoagulants, heparin, hirudin, tick anticoagulant peptide, angiopeptin, antimitotic agents, and oligonucleotides.
 - 22. A stent obtainable by a method as defined in claim 21 wherein said therapeutic substance is an antimitotic agent.
 - 23. A stent obtainable by a method as defined in any preceding claim wherein step (c) comprises evaporating said solvent.
 - **24.** A method for making an intravascular stent comprising the steps of:

5

20

30

35


40


45

50

- (a) providing a generally cylindrical balloon-expandable stent body;
- (b) applying to the stent body a solution which comprises a solvent, a polymer, and a therapeutic substance; and
- (c) drying said solution whereby to provide a coating to the stent body of a polymer and the therapeutic substance.
- 25. A method for making an intravascular stent comprising the steps of:
 - (a) providing a generally cylindrical balloon-expandable stent body;
 - (b) applying to the stent body a solution which comprises a solvent, a polymer, and a therapeutic substance; and
 - (c) drying said solution whereby to provide a coating to the stent body of a polymer and the therapeutic substance in which the coating is less than 0.005 cm thick.
- 26. A method for making an intravascular stent comprising the steps of:
 - (a) providing a generally cylindrical balloon-expandable stent body;
 - (b) applying to the stent body a solution which comprises a solvent, a polymer, and a therapeutic substance wherein the ratio of therapeutic substance to polymer is in the range of from about 10:1 to about 1:100; and
 - (c) drying said solution whereby to provide a coating to the stent body of a polymer and the therapeutic substance.
- 27. A balloon-expandable stent having a polymeric, therapeutic substance-releasing coating in which the coating is less than 0.005 cm thick.

- 28. A balloon-expandable stent having a polymeric, therapeutic substance-releasing coating in which the ratio of therapeutic substance to polymer in said coating is in the range of from about 10:1 to about 1:100.
- 29. A stent as claimed in claim 27 or claim 28 wherein said coating comprises a therapeutic substance which is an antimitotic agent or an oligonucleotide.
- **30.** A stent as claimed in any one of claims 27 to 29 wherein said coating comprises a polymer which is bioabsorbable or biostable.
- 31. A stent as claimed in claim 30 wherein said polymer is selected from poly(L-lactic acid), poly(lactide-co-glycolide), poly(hydroxybutyrate-co-valerate), silicones, polyurethanes, polyesters, vinyl homopolymers and copolymers, acrylate homopolymers and copolymers, polyethers and cellulosics.

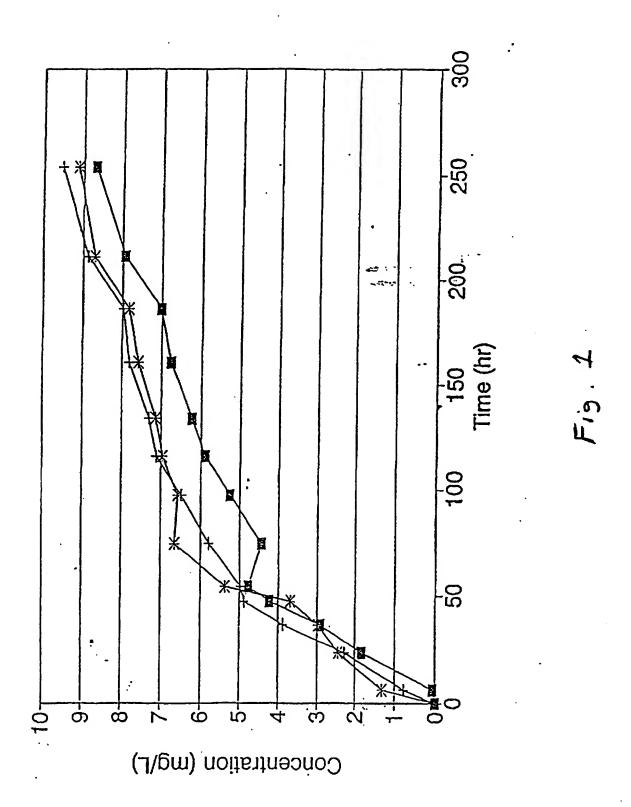

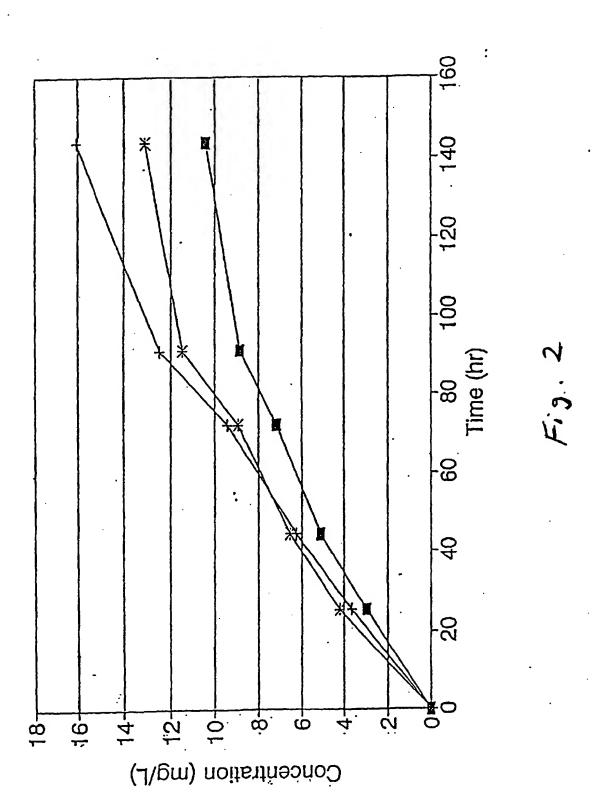



EUROPEAN SEARCH REPORT

Application Number EP 01 12 6059

Category	Citation of document with it of relevant past	ndication, where appropriate,	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.7)
Х		PHARMACEUTICAL CORP.) 1992-09-17) line 17 *		A61L31/00 A61F2/06
X .	WO 91 18940 A (NOVA 12 December 1991 (1 * page 6, line 1 * * page 10, line 18 * page 11, line 1 - * page 27, line 20	- line 20 * line 5 *	1~15	
Х	WO 93 06792 A (SCIM 15 April 1993 (1993 * page 21, line 18		1	
Α	WO 91 17789 A (STAC 28 November 1991 (1 * page 21, line 18 * page 22, line 1 - * page 27, line 11	- line 37 * line 3 *	1-31	TECHNICAL FIELDS SEARCHED (Int.Ci.7)
D, A	WO 91 12779 A (MEDT 5 September 1991 (1 * page 3, line 4 - * page 10, line 32 * page 12, line 23 * page 13, line 5 - * page 13, line 16	991-09-05) line 14 * - line 38 * - line 28 * - line 6 *	1	A61L A61F
Р,Х	EP 0 566 245 A (MED 20 October 1993 (19 * column 6, line 2 * column 8, line 19	93-10-20) - line 17 *	1	
	The present search report has	been drawn up for all claims		
	Phose of search THE HAGUE	Date of completion of the search 14 December 200	1 ESP	Examiner PINOSA, M
X : part Y : part doca A : tech	ATEGORY OF CITED DOCUMENTS icularly relevant if taken alone icularly relevant if combined with anounent of the same category mological background —written disclosure	T : theory or print E : earlier patent after the filing D : document cite L : document cite	ciple underlying the document, but publicate application of for other reasons	invention ished on, or

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 01 12 6059

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-12-2001

9215286 9118940	A A	17-09-1992	AU WO US US US US	1579092 9215286 5437656 5344411 5512055	A1	
 9118940	A		US US US	5437656 5344411	Α	01-08-1995
 9118940	A		US .	5344411		
9118940			US		Δ	
9118940	A			長長1つ八日日		06-09-1994
9118940	A		US			30-04-1996
 9118940	Α			5762638		09-06-1998
9118940	Α		US 	5695458	A 	09-12-1997
		12-12-1991	US	5175235		29-12-1992
			EP	0532638		24-03-1993
			JP	3134935	B2	13-02-2001
			JP	6503588	T	21-04-1994
			WO	9118940		12-12-199
			US 	5240963 	A 	31-08-1993
WO 9306792	Ą	15-04-1993	US			19-10-1999
						15-04-1993
					_	07-11-199!
						03-09-1996
						19-03-1996 23-06-1998
				5/09003		23-00-1990
9117789	Α	28-11-1991	AU			22-09-1994
						10-12-199
						03-03-1993
						16-10-1996
						16-12-1993
					28-11-199 18-06-1990	
				332/33/		10-00-1990
9112779	Α	05-09-1991	CA			29-08-1993
						03-08-1999
		•				04-04-1996
						12-02-1993
						22-04-1993 05-09-1993
						13-08-199
						21-12-199
						16-02-1999
						22-12-199
						10-03-199
						22-12-1998
			US			07-12-1999
05662 4 5	A	20-10-1993	DE	69326631	D1	11-11-199
			DE			08-06-200
	9117789 9112779	9117789 A 9112779 A	9117789 A 28-11-1991 9112779 A 05-09-1991	WO US	W0 9306792 US 5464450 US 5551954 US 5500013 US 5769883 P117789 A 28-11-1991 AU 653159 AU 8001891 EP 0528993 EP 0737453 JP 5509008 W0 9117789 US 5527337 P112779 A 05-09-1991 CA 2049973 DE 69110787 DE 69110787 DE 69110787 DE 69110787 EP 0470246 JP 5502179 W0 9112779 US 5545208 US 6004346 US 5871535 US 5851237 US 5725567 US 5851231 US 5997468 D5666245 A 20-10-1993 DE 69326631 DE 69326631	WO 9306792 A1 US 5464450 A US 5551954 A US 5500013 A US 5769883 A P117789 A 28-11-1991 AU 653159 B2 AU 8001891 A EP 0528993 A1 EP 0737453 A2 JP 5509008 T WO 9117789 A1 US 5527337 A P112779 A 05-09-1991 CA 2049973 A1 DE 69110787 D1 DE 69110787 T2 EP 0470246 A1 JP 5502179 T WO 9112779 A1 US 5545208 A US 5871535 A US 5871535 A US 5871535 A US 5871537 A US 5851217 A US 5725567 A US 5851231 A US 5997468 A

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 01 12 6059

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-12-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0566245 A	EP JP US US US US US US US US US US	0566245 A1 6007455 A 6080190 A 5957971 A 5571166 A 5599352 A 5591224 A 5510077 A 5554182 A 5591227 A 5800507 A 5697967 A 5628785 A 5849034 A	20-10-1993 18-01-1994 27-06-2000 28-09-1999 05-11-1996 04-02-1997 07-01-1997 23-04-1996 07-01-1997 01-09-1998 16-12-1997 13-05-1997 15-12-1998
	•		
•	· · · · · · · · · · · · · · · · · · ·		
			·
			•
more details about this annex : see			

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS

IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT OR DRAWING

BLURRED OR ILLEGIBLE TEXT OR DRAWING

SKEWED/SLANTED IMAGES

COLOR OR BLACK AND WHITE PHOTOGRAPHS

GRAY SCALE DOCUMENTS

LINES OR MARKS ON ORIGINAL DOCUMENT

REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

IMAGES ARE BEST AVAILABLE COPY.

☐ OTHER: ___

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.